



△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

發行
2013.06.10
達立




RoHS
Compatible

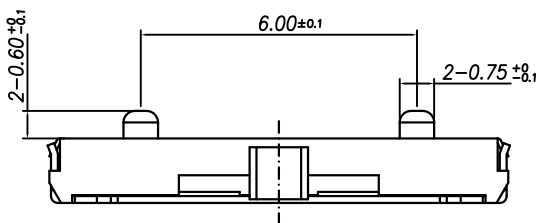

Circuit Diagram
1-pole, 3-positions


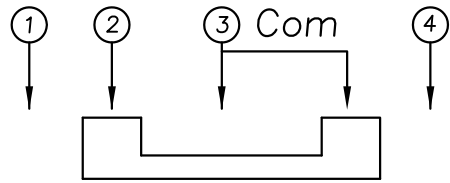


P.C.B Mounting
pattern Dimension

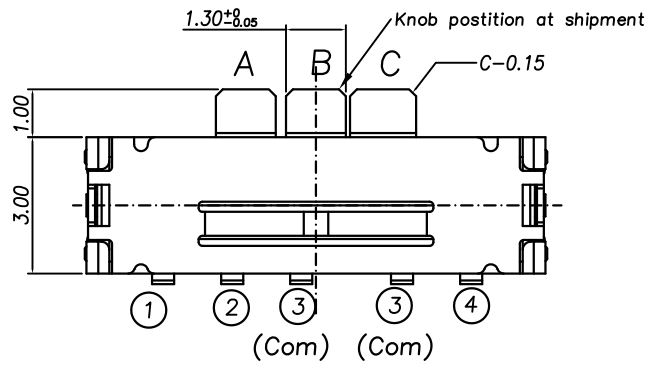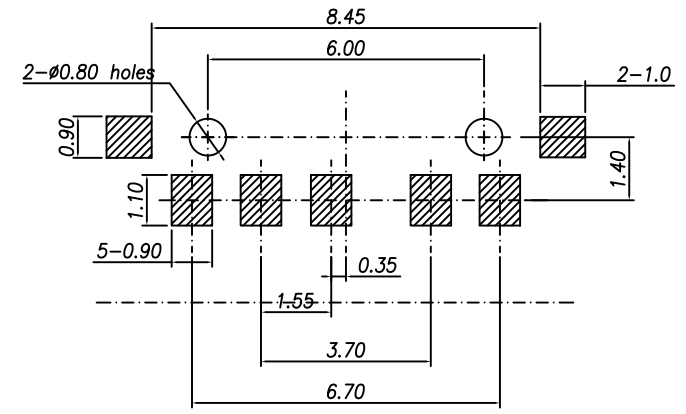

Specifications

1. Rating : DC 15V 0.3A.
2. Circuit : 1C-3P.
3. Travel : 1.50 mm.
4. Contact resistance : 1Ω (Max.) or less.
5. Self return & with click : 150±100gf.
6. Operating life : 5,000 cycles Min.

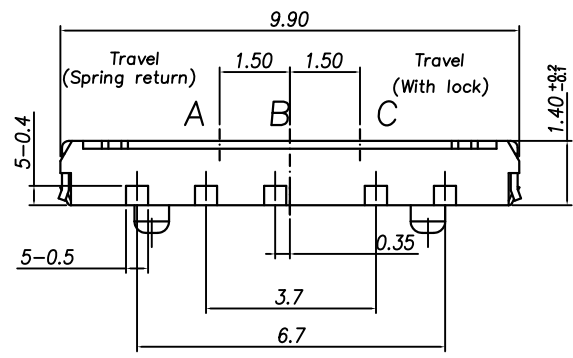

6	Spring	Stainless Steel	1	—
5	Contact	Phospher Bronze	1	Ag Plated
4	Stem	PA46	1	Black
3	Cover	Stainless Steel	1	Ag Plated
2	Terminal	Brass	5	Ag Plated
1	Case	LCP	1	Black
NO	Part Name	Material	Q'ty	Finishing

達立科技股份有限公司
Dawning Precision Co., Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Frank	SCALE		
DRAWING	Frank	UNIT	mm	
CHECK	Frank	SIZE	A4: 210*297	
APPROVAL	Eric	VERSION	01	

TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	SLIDE SWITCH
less than 10 — ±0.2	PART NO	SS-1301A
10~30 — ±0.3	DRAWING NO	
30~100 — ±0.5	DATE	2013/06/10
ANGIE — ±2°		