
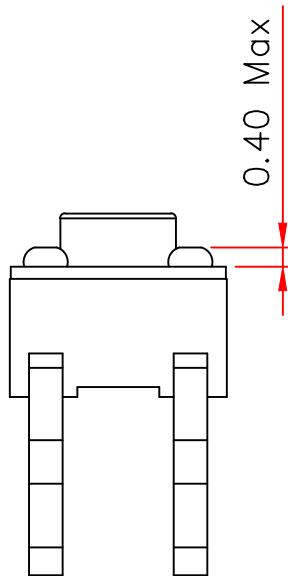




4				
3				
2				
1				
ZONE	REV	DESCRIPTION	DATE	APPD.

R&D發行
2017.05.16
達立


RoHS
Compatible

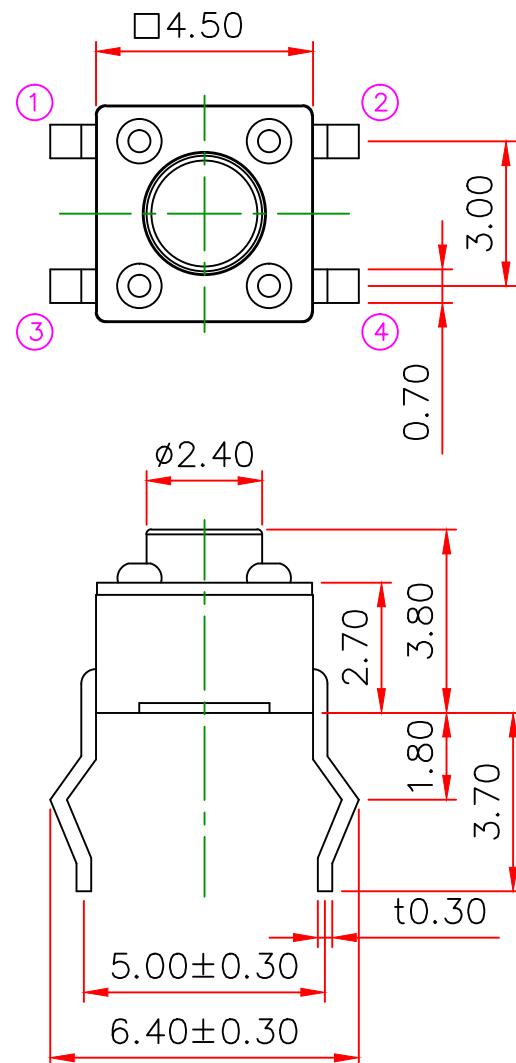

CIRCUIT DIAGRAM



RECOMMENDED P.C.B MOUNTING PATTERN DIMENSION

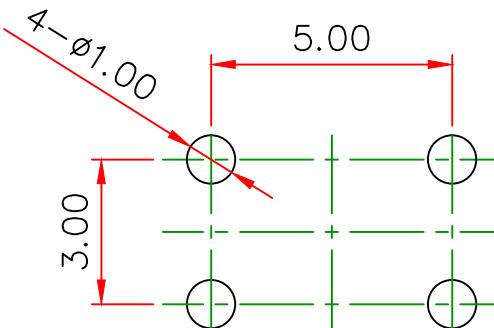

Specifications

- Rating : DC 12V, 50mA.
- Travel : 0.25 ± 0.1 mm
- Contact resistance : $100\text{m}\Omega$ Max.
- Insulation resistance : $100\text{M}\Omega$ Min.
- Operating force : 130 ± 30 gf
- Operating life : 100,000 cycles.

5	Stem	PPA	1	Black
4	Cover	Steel	1	Sn Plated
3	Contact	SUS	1	Ag Clad
2	Terminal	Brass	1	Ag Plated
1	Case	PPA	1	Black
No.	Part Name	Material	Q'ty	Finishing

DESIGN	Eason	SCALE			TOLERANCE UNLESS OTHERWISE STATED(mm)	PART NAME	TACT SWITCH
DRAWING	Eason	UNIT	mm		0.0 ± 0.35	PART NO	TS-A09-1-S085
CHECK	Eason	SIZE	A4: 210*297		0.0 ± 0.30	DRAWING NO	
APPROVAL	Honda	VERSION	01		0.00 ± 0.20	DATE	2017/05/16

達立科技股份有限公司
Dawning Precision Co.,Ltd.
TEL: 886-2-82271388 FAX: 886-2-82272198