

△				
△				
△				
△				
ZONE	REV	DESCRIPTION	DATE	APPD.

Order information :  
18148-9K7A1-x-S186  
1 2 3 4 5








- Housing material  
9 = Thermoplastic
- Housing color  
K = Black
- Shell material & plating  
7=Stainless / Ni
- Contact plating  
A = Au Plated
- Packing  
1 = Tape & Reel

Model No.	DIM.A	DIM.B
18148-9K7A1-A	6.80	6.75
18148-9K7A1-B	6.80	6.90
18148-9K7A1-C	6.50	6.45

R&D發行  
2023.09.12  
達立

**RoHS**  
**Compatible**

RECOMMENDED P.C.B MOUNTING  
(TOP VIEW) TOLERANCE: ±0.05

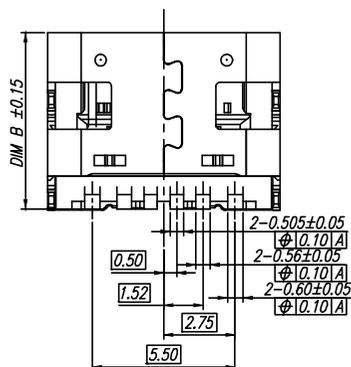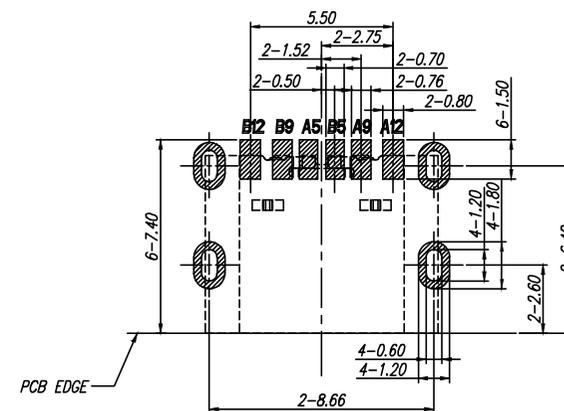

Specifications

- Current Rating: 3.0 A
- Contact resistance: 30mΩ Max.
- Insulation resistance: 100MΩ Min.
- Dielectric withstanding voltage: 100V AC/1 minute
- Insertion force: 5~20N
- Removal force: 8~20N
- Durability : 10,000 Cycles
- Operation Temperature : -40°C ~ +85°C

PIN ASSIGNMENT												BLADE	SHELL
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12		
GND	TX1+	TX1-	VBUS	CC1	D+	D-	SBUS	VBUS	RX2-	RX2+	GND		
GND	RX1+	RX1-	VBUS	SBUS2	R-	R+	CC2	VBUS	TX2-	TX2+	GND	GND	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1		

3	Contact	Copper Alloy	1	Au & Ni Plated
2	Molding Housing	Plastic	1	Black
1	Shell	Stainless Steel	1	Ni Plated
No.	Part Name	Material	Q'ty	Finishing

達立科技股份有限公司

Dawning Precision Co., Ltd.

TEL: 886-2-82271388 FAX: 886-2-82272198

DESIGN	Charles	SCALE		
DRAWING	Charles	UNIT	mm	
CHECK	Charles	SIZE	A4: 210*297	
APPROVAL	Baker	VERSION	02	

TOLERANCE UNLESS OTHERWISE STATED(mm)		PART NAME	USB C TYPE
0	±0.30	PART NO	18148-9K7A1-x-S186
0.0	±0.25	DRAWING NO	
0.00	±0.20	DATE	2023/09/12
ANGIE	±5°		